

Ref. **1007**


BROCA MANGO REBAJADO HSS. SERIE CORTA

HSS Reduced Shank Twist Drill. Jobber Series

Foret Queue Réduit HSS. Serie Courte



HSS	DIN 338 N	118°						Blue Finish	Rectificado Ground Taillé Meulé		Tol. D h8
-----	-----------	------	--	--	--	--	--	-------------	------------------------------------	--	-----------

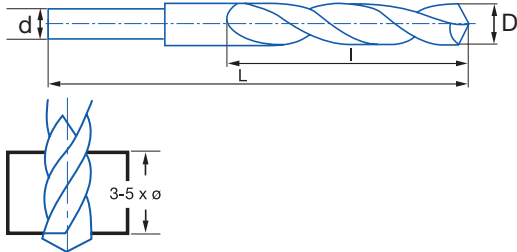

Material		Vc	Avances mm/rev. Feed / Pas			
Grupo	Sub.	HSS	Ø 12	Ø 16	Ø 20	Ø 25
1	1.1	25-30	0,160	0,180	0,250	0,430
	3.1	30-35	0,250	0,300	0,360	0,360
3	3.2	25-30	0,200	0,240	0,280	0,340
	6.1	60-80	0,320	0,380	0,450	0,540
6	6.2	60-80	0,320	0,380	0,450	0,540
	6.3	40-50	0,250	0,300	0,360	0,430

Vc = m/min.

$$r.p.m. = \frac{Vc \times 1.000}{\pi \times \phi}$$

Ø mm	d mm	L mm	l mm		N° Art. HSS	€
10,50	10,00	133	87	1	15976	6,74
11,00	10,00	142	94	1	15977	7,62
11,50	10,00	142	94	1	15978	8,06
12,00	10,00	151	101	1	15979	8,79
12,50	10,00	151	101	1	15980	9,53
13,00	10,00	151	101	1	15981	9,80
13,50	12,70	160	108	1	15982	13,25
14,00	12,70	160	108	1	15984	14,07
14,50	12,70	169	114	1	15985	15,03
15,00	12,70	169	114	1	15987	15,18
15,50	12,70	178	120	1	15988	17,50
16,00	12,70	178	120	1	15989	18,15
16,50	12,70	184	125	1	15990	20,36
17,00	12,70	184	125	1	15991	20,36

Ø mm	d mm	L mm	l mm		N° Art. HSS	€
17,50	12,70	191	130	1	15992	23,16
18,00	12,70	191	130	1	15993	24,39
18,50	12,70	198	135	1	15994	26,90
19,00	12,70	198	135	1	15995	26,90
19,50	12,70	205	140	1	15996	29,32
20,00	12,70	205	140	1	15997	33,78
21,00	12,70	205	145	1	17071	35,73
22,00	12,70	210	150	1	17072	39,41
23,00	12,70	210	150	1	36364	43,11
24,00	12,70	220	160	1	36365	47,57
25,00	12,70	220	160	1	36366	51,87