


NK.A - DOUILLES IMPACT 3/4" 6 PANS MÉTRIQUES

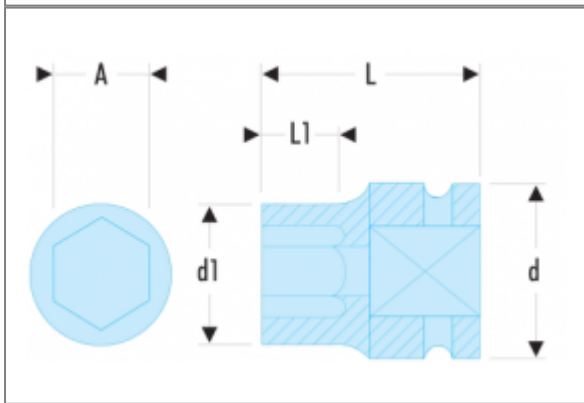

Norme :


NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33

Description :

- Pour votre sécurité, utilisez les douilles impact avec les bagues et goupilles adaptées.

Références :

	A [mm]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	6 pans [mm]	BA	GA	[g]
NK.17A	17	44	30	52	12	6	BA.38A	GA.37A	300
NK.18A	18	44	32	50	13	6	BA.38A	GA.37A	310
NK.19A	19	44	33	50	14	6	BA.38A	GA.37A	315
NK.21A	21	44	35	50	15	6	BA.38A	GA.37A	330
NK.22A	22	44	37	50	16	6	BA.38A	GA.37A	345
NK.23A	23	44	38	50	16	6	BA.38A	GA.37A	350
NK.24A	24	44	39	50	17	6	BA.38A	GA.37A	350
NK.26A	26	44	42	50	18	6	BA.38A	GA.37A	480
NK.27A	27	44	43	54	23	6	BA.38A	GA.37A	480
NK.28A	28	44	44	54	23	6	BA.38A	GA.37A	520
NK.29A	29	44	45	54	23	6	BA.38A	GA.37A	520
NK.30A	30	44	47	54	23	6	BA.38A	GA.37A	545
NK.32A	32	44	49	56	23	6	BA.38A	GA.37A	620
NK.33A	33	44	51	56	23	6	BA.38A	GA.37A	650
NK.34A	34	44	52	56	23	6	BA.38A	GA.37A	680
NK.35A	35	44	53	56	23	6	BA.38A	GA.37A	680

	A [mm]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	6 pans [mm]	BA	GA	[g]
NK.36A	36	44	54	56	25	6	BA.38A	GA.37A	705
NK.38A	38	44	57	58	26	6	BA.38A	GA.37A	890
NK.41A	41	44	60	58	28	6	BA.38A	GA.37A	890
NK.42A	42	44	62	58	29	6	BA.38A	GA.37A	925
NK.46A	46	44	67	63	32	6	BA.38A	GA.37A	1055